

Engineering of orbital angular momentum supermodes in coupled optical waveguides

A. Turpin¹, G. Pelegri^{1,*}, J. Polo¹, J. Mompart¹, and V. Ahufinger¹

¹Departament de Física, Universitat Autònoma de Barcelona, E-08193 Bellaterra, Spain

*gerard.pelegri@uab.cat

ABSTRACT

In this work we demonstrate the existence of orbital angular momentum (OAM) bright and dark supermodes in a three-evanescent coupled cylindrical waveguides system. Bright and dark supermodes are characterized by its coupling and decoupling from one of the waveguides, respectively. In addition, we demonstrate that complex couplings between modes of different waveguides appear naturally due to the characteristic spiral phase-front of OAM modes in two-dimensional configurations where the waveguides are arranged forming a triangle. Finally, by adding dissipation to the waveguide uncoupled to the dark supermode, we are able to filter it out, allowing for the design of OAM mode cloners and inverters.

Introduction

Integrated optical devices are named to revolutionize data transfer technologies and computing platforms due to the high speed and quality of light-based communications. Optical waveguides are the key elements in photonic integrated circuits due to their feasible integration with additional electronic circuits. Devices based on planar optical waveguides such as couplers, Mach-Zehnder interferometers, power splitters, optical modulators, wavelength demultiplexers and frequency filters have already been demonstrated¹⁻⁶. Most of these devices take profit of the evanescent field of optical waveguides to couple two or more of these using photon tunneling. Cylindrical waveguides offer the additional functionality of allowing complex structured light modes, such as light modes carrying orbital angular momentum (OAM). Light beams with OAM typically possess a phase singularity in their wavefront manifesting as a null intensity point preserved upon propagation in free-space or in cylindrically symmetric waveguides^{7,8}. Although different light modes with well-defined amount of OAM have been reported, Laguerre-Gauss (LG) beams are the paradigm ones⁹. LG beams form a complete set of spatial modes that are solution of the paraxial wave equation. They are described by Laguerre polynomials $L_p^{(l)}$, where p is the number of radial nodes and l is the azimuthal index. In particular, they are characterized by an azimuthal term in their phase with the form $\exp(il\phi)$, where l indicates the amount of OAM carried per photon. Other well-known examples of light beams carrying quantized OAM per photon are Bessel beams¹⁰, also having the characteristic azimuthal phase $\exp(il\phi)$. Bessel beams are specially interesting since they are the fundamental family of optical modes in cylindrical waveguides^{1,2}. The possibility of using light beams carrying OAM adds more degrees of freedom to the control of light beams in integrated optical devices. To date, photon tunneling between coupled cylindrical waveguides carrying OAM modes has been theoretically studied in systems of two-coupled few mode waveguides^{11,12} and in a two-coil multimode fiber resonator¹³.

In this work, we investigate the propagation of OAM modes in a system of three cylindrical waveguides arranged in a triangular configuration. In particular, we show that photon tunneling amplitudes between OAM modes of adjacent waveguides that have opposite topological charge are, in general, complex. For the particular case of the in-line and the right triangle configurations, we demonstrate the existence of bright and dark supermodes in the system, which are characterized by its coupling and decoupling from the central waveguide, respectively. Thus, we discuss that any of these two configurations can be used to implement an OAM cloner and an OAM inverter by simply adding dissipation in the central waveguide while taking advantage of the projection of the input state into the dark supermode when it propagates through the system.

Results

OAM dark supermodes in coupled waveguides

The geometry of the optical system we consider is depicted in Fig. 1(a). We consider three identical evanescent coupled step-index cylindrical waveguides of radius a and refractive index n_2 embedded in a medium of refractive index n_1 . We fix d_{mn} as the distance between the waveguide m and n where $m, n = \{L, C, R\}$, account for the left, central, and right waveguides, respectively. The three waveguides support OAM modes, and are arranged in an isosceles triangular configuration, i.e.,

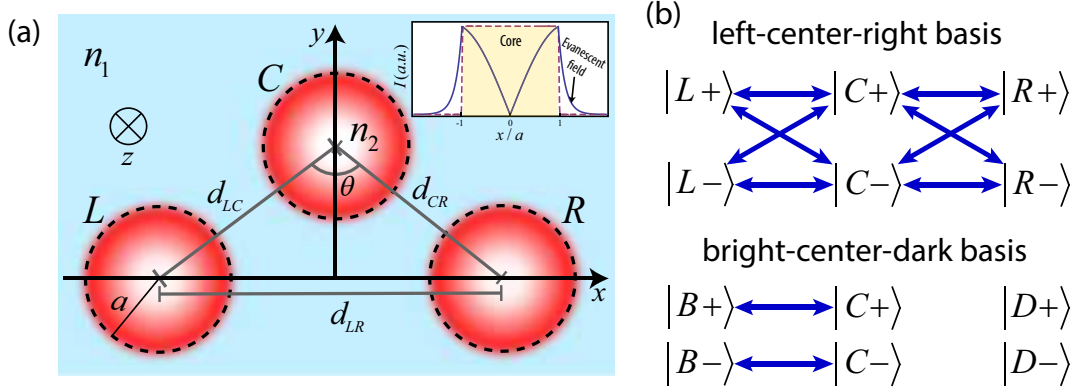


Figure 1. (a) System of three identical waveguides of radius a and refractive index n_2 in an isosceles triangular configuration embedded in a medium of refractive index n_1 . L , C , and R account for the left, central and right waveguides, respectively. The distance d_{LR} between left and right waveguides is assumed to be larger than $d_{LC} = d_{CR}$, such that the direct coupling between left and right modes is negligible. The inset depicts the radial intensity profile of the allowed optical modes (blue solid curve) with one unit of OAM per photon propagating along the step-index waveguides colored in yellow and delimited by the purple-dashed curve. (b) Schematic representation of the couplings between waveguides' modes in the basis left-center-right (LCR , top) and in the basis bright-center-dark (BCD , bottom). In the basis LCR , $|L\pm\rangle$ and $|R\pm\rangle$ modes are coupled to the waveguide C . In contrast, in the basis BCD , bright supermodes $|B\pm\rangle$ and dark supermodes $|D\pm\rangle$ are strongly coupled and completely decoupled to the waveguide C , respectively.

$d_{LC} = d_{CR}$. Optical modes in step-index cylindrical waveguides have the form

$$U_{m,l}(r_m, \phi_m, z) = a_{m,l}(z) u_l(r_m) e^{il(\phi_m - \phi_0)}, \quad (1)$$

$$u_l(r_m) = \begin{cases} C_1 J_l(k_\tau r_m) & \text{if } r_m \leq a \\ C_2 K_l(\alpha r_m) & \text{if } r_m > a, \end{cases} \quad (2)$$

where ϕ_0 is a free phase parameter defining the origin of the phase, J_l is the Bessel function of the first kind and order l , K_l is the modified Bessel function of the second kind and order l , $k_\tau = n_1^2 k_0^2 - \beta^2$, $\beta^2 = n_1^2 k_0^2 \left(1 - \frac{\pi^2}{a^2}\right)$ is the propagation constant, $\alpha = \beta^2 - n_2^2 k_0^2$, and $k_0 = \frac{2\pi}{\lambda_0}$ is the wave-number in vacuum^{1,2}. C_1 and C_2 are constants satisfying 1) continuity at $r = a$ and 2) $\int |U_{m,l}(r_m, \phi_m)|^2 dS_m = P_0$, where P_0 is the power of the input beam propagating through the waveguide m and $dS_m = r_m dr_m d\phi_m$. For concreteness, in this work we concentrate on $l = \pm 1$. To simplify our formalism, we will assume homogeneously linearly polarized light modes, as it is commonly done for closely spaced non-chiral waveguides¹¹⁻¹³. In general, optical coupling between adjacent waveguides depends both on the form of the optical modes and on the geometry of the waveguides. For the case here considered, the coupling coefficients for two-coupled waveguides m and n carrying $g\hbar$ and $h\hbar$ OAM per photon (with $g, h = \{+, -\}$), respectively, reads:

$$\kappa_{m,g}^{n,h} = e^{i(h-g)\phi_0} \int u_m(r_m) e^{ig\phi_m} u_n(r_n) e^{-ih\phi_n} dS_n. \quad (3)$$

While for an isolated two-coupled waveguide system the origin of the phase can be set to $\phi_0 = 0$, in a system of three coupled waveguides in a triangular configuration this is only allowed for one of the two waveguides pairs. For the system under investigation, we choose the origin of the phase in the direction of LC . Additionally, we assume d_{LR} large enough compared to $d_{LC} = d_{CR}$ such that the coupling between the waveguide L and R can be neglected. Light propagation in our system can be described through coupled mode equations^{1,2}. These equations govern the evolution along the propagation direction of the field amplitudes, $a_{m,g}$, that correspond to the $g\hbar$ OAM mode propagating through the optical waveguide m :

$$i \frac{d}{dz} a_{m,g}(z) = \sum_{n,h} \kappa_{m,g}^{n,h} a_{n,h}(z) \quad \text{with } m, n = L, C, R \text{ and } g, h = \pm, \quad (4)$$

where $\kappa_{m,g}^{n,h}$ are the elements of the mode-coupling matrix (M) of the system. According to Eqs. (1)–(3) and by choosing the origin of phase in the direction of LC , the obtained relations between coupling coefficients are:

$$\kappa_{n,+}^{m,+} = \kappa_{n,-}^{m,-} = \kappa_{m,+}^{n,+} = \kappa_{m,-}^{n,-} \equiv \kappa_1 \text{ for } n = L, R; m = C, \quad (5)$$

$$\kappa_{L,+}^{C,-} = \kappa_{L,-}^{C,+} = \kappa_{C,+}^{L,-} = \kappa_{C,-}^{L,+} \equiv \kappa_2, \quad (6)$$

$$\kappa_{R,+}^{C,*} = \kappa_{R,-}^{C,+} = \kappa_{C,+}^{R,*} = \kappa_{C,-}^{R,+} = \kappa_2 e^{i2\theta}, \quad (7)$$

where $\kappa_1, \kappa_2 \in \mathbb{R}$ and θ is the angle between the LC and RC axes, see Fig. 1. Under these conditions, M becomes

$$M = \begin{pmatrix} 0 & 0 & \kappa_1 & \kappa_2 & 0 & 0 \\ 0 & 0 & \kappa_2 & \kappa_1 & 0 & 0 \\ \kappa_1 & \kappa_2 & 0 & 0 & \kappa_1 & \kappa_2 e^{-i2\theta} \\ \kappa_2 & \kappa_1 & 0 & 0 & \kappa_2 e^{i2\theta} & \kappa_1 \\ 0 & 0 & \kappa_1 & \kappa_2 e^{-i2\theta} & 0 & 0 \\ 0 & 0 & \kappa_2 e^{i2\theta} & \kappa_1 & 0 & 0 \end{pmatrix}, \quad (8)$$

expressed in the basis $\{|L+\rangle, |L-\rangle, |C+\rangle, |C-\rangle, |R+\rangle, |R-\rangle\}$, in what follows being denoted as LCR . For simplicity, we use here the standard Dirac notation of quantum mechanics, i.e., $\langle r_m, \phi_m | m, g \rangle \equiv U_{m,g}(r_m, \phi_m)$. Thus, by geometrically arranging the three-coupled cylindrical waveguides carrying OAM modes, one can easily obtain complex coupling amplitudes between OAM modes of adjacent waveguides that possess opposite topological charge. Worth to highlight here, these complex couplings may open the way to simulate artificial gauge fields and to simulate involved solid-state Hamiltonians¹⁴.

The dynamics of our system given by Eq. (4) can be described in different bases. The most natural is to use the basis LCR , for which there is a direct correspondence between the elements of the basis and the localized OAM modes. However, one can also define a symmetric-center-antisymmetric (SCA) basis, where the symmetric (S) and antisymmetric (A) supermodes are defined as

$$|S\pm\rangle \equiv \frac{1}{\sqrt{2}}(|L\pm\rangle + |R\pm\rangle), \quad (9)$$

$$|A\pm\rangle \equiv \frac{1}{\sqrt{2}}(|L\pm\rangle - |R\pm\rangle). \quad (10)$$

For $\theta = \frac{\pi}{2}$ and $\theta = \pi$, i.e., for the right triangle configuration and for the in-line configuration, one can define the bright-central-dark (BCR) basis, where the bright (B) and dark (D) supermodes read

$$|B\pm\rangle_{\theta=\frac{\pi}{2}} \equiv \frac{1}{\kappa}(\kappa_1 |S\pm\rangle + \kappa_2 |A\mp\rangle) = \frac{1}{\sqrt{2}\kappa}[\kappa_1(|L\pm\rangle + |R\pm\rangle) + \kappa_2(|L\mp\rangle - |R\mp\rangle)], \quad (11)$$

$$|D\pm\rangle_{\theta=\frac{\pi}{2}} \equiv \frac{1}{\kappa}(\kappa_2 |S\pm\rangle - \kappa_1 |A\mp\rangle) = \frac{1}{\sqrt{2}\kappa}[\kappa_2(|L\pm\rangle + |R\pm\rangle) - \kappa_1(|L\mp\rangle - |R\mp\rangle)], \quad (12)$$

$$|B\pm\rangle_{\theta=\pi} \equiv \frac{1}{\sqrt{2}}(|S-\rangle \pm |S+\rangle) = \frac{1}{2}(|L+\rangle \pm |L-\rangle + |R+\rangle \pm |R-\rangle), \quad (13)$$

$$|D\pm\rangle_{\theta=\pi} \equiv \frac{1}{\sqrt{2}}(|A+\rangle \pm |A-\rangle) = \frac{1}{2}(|L+\rangle \pm |L-\rangle - |R+\rangle \mp |R-\rangle), \quad (14)$$

with $\kappa \equiv \sqrt{\kappa_1^2 + \kappa_2^2}$. It is straightforward to check that $\{|B+\rangle, |C+\rangle, |D+\rangle\}$ and $\{|B-\rangle, |C-\rangle, |D-\rangle\}$ are two uncoupled subspaces of the full Hilbert space and that $\langle C\pm | D\pm \rangle = \langle B\pm | C\pm \rangle = 0$ and $\langle B\pm | C\pm \rangle \neq 0$. Therefore, the bright (dark) supermodes are characterized by its coupling (decoupling) with the central waveguide, as sketched in Fig. 1(b), in a similar way that bright (dark) states are coupled (uncoupled) to an intermediate state in three-level atomic systems in quantum optics^{15,16}. In what follows, we will use the BCD basis to understand the dynamics of OAM modes propagating in the three coupled waveguides system.

Dynamics of OAM supermodes in the presence of dissipation

We focus on the case $\theta = \pi$, i.e., the in-line configuration. However, note that since our approach is based on the use of bright and dark supermodes, the forthcoming results are also found in the right triangular configuration. Fig. 2(a) shows plots of the evolution along the z axis of the OAM modes intensities according to our six-state model when injecting a bright and a dark supermode given by Eqs. (13) and (14) into the three-waveguide system, i.e., for $a_{B,+}(0) = 1$ (left column), $a_{B,-}(0) = 1$ (central column), and $a_{D,+}(0) = 1$ (right column; analogous results are obtained for $a_{D,-}(0) = 1$). The first row corresponds to the intensity evolution of $|L+\rangle$ ($|a_{L+}|^2$, red solid line) and $|L-\rangle$ ($|a_{L-}|^2$, orange dashed line); the second row corresponds to

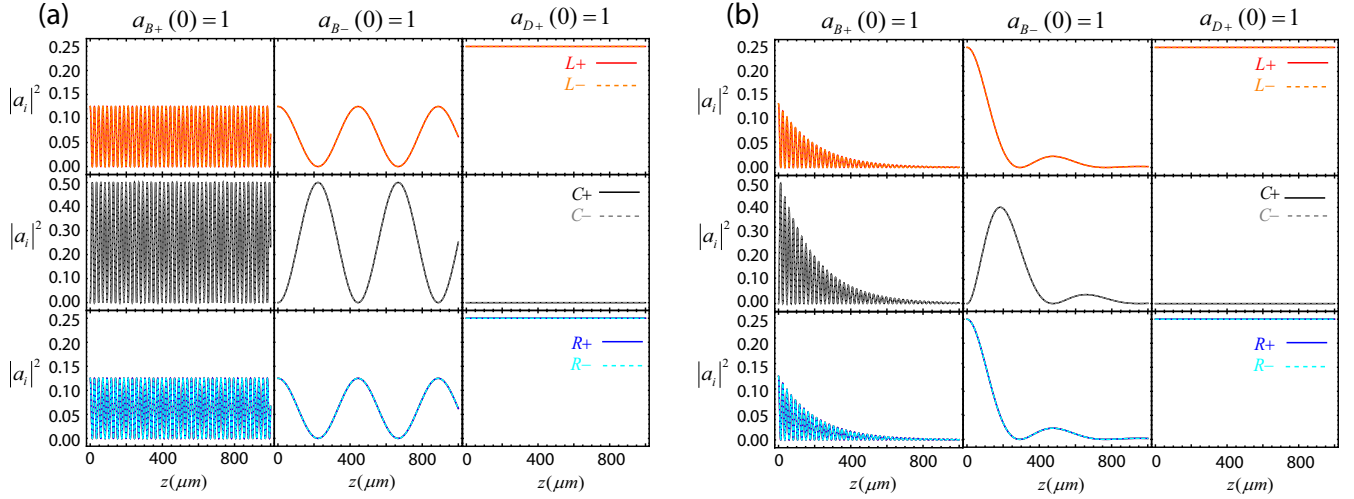


Figure 2. Intensity evolution along the z direction for the $|L+\rangle$ (red-solid curve), $|L-\rangle$ (orange-dashed curve), $|C+\rangle$ (black-solid curve), $|C-\rangle$ (gray-dashed curve), and $|R+\rangle$ (blue-solid curve), $|R-\rangle$ (turquoise-dashed curve) OAM modes when $|B+\rangle$ (first column), $|B-\rangle$ (second column), and $|D+\rangle$ (third column) are injected to the system. (a): Without absorption along the C waveguide. (b): With a power absorption coefficient $\gamma = 3 \times 10^4 \text{ m}^{-1}$ for the C waveguide. Parameters used in the simulations: $\lambda = 1.55 \mu\text{m}$, $P_0 = 10 \text{ mW}$, $n_1 = 1.51$, $n_2 = 1.52$, $a = 10 \mu\text{m}$, $d_{LR} = d_{RC} \equiv d = 1.2a$, and $\kappa_1 = 5.0 \times 10^4 \text{ m}^{-1}$, $\kappa_2 = 4.5 \times 10^4 \text{ m}^{-1}$.

$|C+\rangle$ ($|a_{C+}|^2$, black solid line) and $|C-\rangle$ ($|a_{C-}|^2$, gray dashed line); and the third row corresponds to $|R+\rangle$ ($|a_{R+}|^2$, blue solid line) and $|R-\rangle$ ($|a_{R-}|^2$, turquoise dashed line) OAM modes. Bright supermodes are strongly coupled to the central waveguide, in particular the supermode $|B+\rangle$, as it can be clearly seen from the fast intensity oscillations. In contrast, dark supermodes are completely decoupled from the central waveguide.

Now, we will consider that the central waveguide absorbs light by replacing the corresponding two equations for the a_{C+} and a_{C-} modes in Eq. (4) by:

$$i \frac{d}{dz} a_{Cg}(z) = \sum_{m,h} \kappa_s a_{mh}(z) - i \frac{\gamma}{2} a_{Cg}(z), \quad (15)$$

where $m = L, R$, $g, h = \pm$, κ_s are the corresponding coupling coefficients (see Methods), and γ is the power absorption coefficient. Fig. 2(b) shows plots of the evolution along the z axis of the OAM modes intensities by numerical integration of the coupled-mode equations of the six-state model when injecting bright and dark supermodes into the three-waveguide system with the absorption coefficient $\gamma = 3 \times 10^4 \text{ m}^{-1}$ in the waveguide C . As it can be appreciated, the presence of absorption makes the dynamics of the system particularly interesting since the supermodes $|B\pm\rangle$ are completely absorbed after a certain propagation distance and only the supermodes $|D\pm\rangle$ are transmitted loseless through the system.

Discussion

To show the suitability of dissipation to control the dynamics of OAM supermodes in coupled waveguides systems, in what follows we show how to implement a mode cloner and a mode inverter in an in-line configuration ($\theta = \pi$) with absorption at the central waveguide. The absorption of supermodes $|B\pm\rangle$ can be used to engineer the outgoing OAM modes at the waveguides L and R . For instance, from Eqs. (13) and (14), one can write that $2|R+\rangle = |B+\rangle + |B-\rangle - |D+\rangle - |D-\rangle$. Since we have shown that $|B\pm\rangle$ supermodes are absorbed by the waveguide C and that $|D\pm\rangle$ supermodes are completely decoupled from it, by injecting $|R+\rangle$ the output beam after a certain propagation distance becomes $|D+\rangle + |D-\rangle = 2(|L+\rangle - |L-\rangle)$, up to a global phase. Therefore, one obtains with a 50% efficiency the superposition state $|R+\rangle - |L+\rangle$, which means that the input state can be cloned at waveguide L , as sketched in Fig. 3(a). The device here discussed can also be envisaged as a robust coherent beam splitter with 50% efficiency. Fig. 3(b) shows plots of the axial evolution of the OAM modes intensities in an OAM cloning process when $|R+\rangle$ is injected. As it can be observed, the intensities of the output modes emerging from waveguides R and L are identical after some propagation distance. Similar results are obtained for other input states, i.e., for an input state with the form $|m\pm\rangle$, the outcome $|n\pm\rangle - |m\pm\rangle$ is expected, where $m, n = \{L, R\}$ and $m \neq n$. Note that it is not possible to coherently split an OAM mode between two-evanescent parallel coupled waveguides since the breaking of the cylindrical symmetry of the system couples states with opposite topological charge.

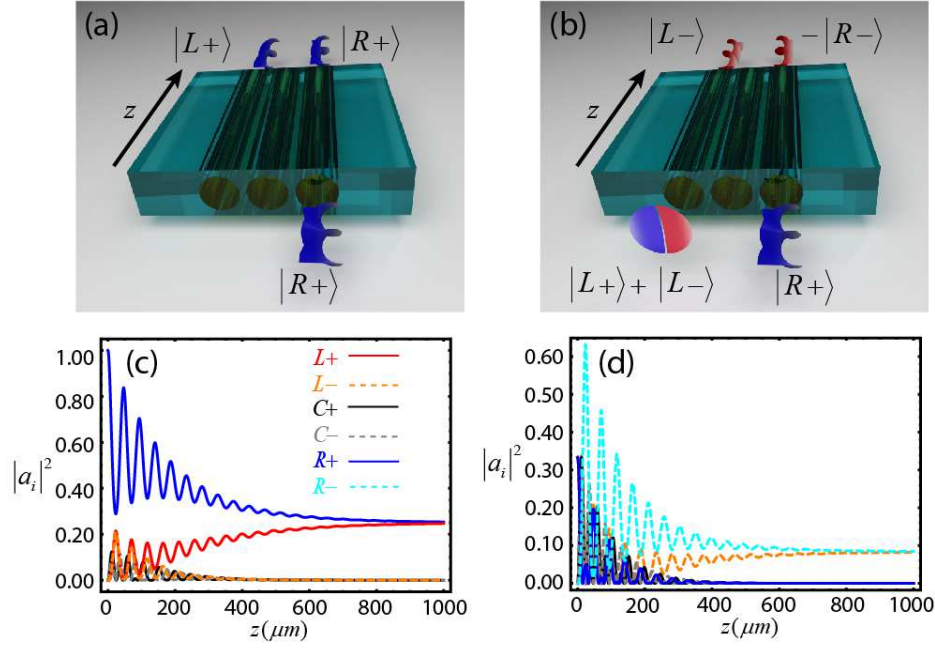


Figure 3. Examples on the OAM modes engineering in an in-line three-coupled waveguide system assisted by dissipation in the central waveguide. (a) OAM cloning of the $|R+\rangle$ mode to the waveguide L . (b) OAM switcher of the $|R+\rangle$ mode to the $|R-\rangle$ mode. Bottom row: intensity evolution along the z direction of $|L+\rangle$ (red-solid curve), $|L-\rangle$ (orange-dashed curve), $|C+\rangle$ (black-solid curve), $|C-\rangle$ (gray-dashed curve), and $|R+\rangle$ (blue-solid curve), $|R-\rangle$ (turquoise-dashed curve) OAM modes. (c) and (d) correspond to (a) and (b), respectively. Same parameters as in Fig. 2 were used, together with an absorption coefficient $\gamma = 3 \times 10^4 \text{ m}^{-1}$ at the waveguide C .

Furthermore, the coupling between $|B\pm\rangle$ supermodes with the absorbing central waveguide leads to a counterintuitive result: states $|R\pm\rangle + |L\pm\rangle$ are completely dissipated when propagating through the system, since they have null projection with the dark supermodes. As a consequence, input states with the form $|m\pm\rangle + |n\pm\rangle$, which have $0\hbar$ OAM at the waveguide m and $\pm\hbar$ OAM at the waveguide n , emerge as $|m\mp\rangle - |n\mp\rangle$ from the system, where $m, n = \{L, R\}$ with $m \neq n$. Thus, one can induce net OAM at the waveguide m and control its sign by appropriately choosing the input state at the waveguide n , and vice versa. An alternative interpretation is that this configuration can be used to invert the sign of the OAM state at the waveguide n by injecting a state with null OAM at the waveguide m . To better visualize this concept, in Fig. 3(c) we show the case $|L+\rangle + |L-\rangle + |R+\rangle \rightarrow |L-\rangle - |R-\rangle$, where the blue and red spirals indicate light modes carrying $\pm\hbar$ OAM per photon, respectively. In Fig. 3(d) we plot the evolution along the z axis of the OAM modes intensities when $|L+\rangle + |L-\rangle + |R+\rangle$ is injected ($\gamma = 3 \times 10^4 \text{ m}^{-1}$ at the waveguide C). As it can be observed, after some propagation distance, only the dark supermode contribution of the input state, proportional to $|D+\rangle + |D-\rangle = |L-\rangle - |R-\rangle$ survives, which corresponds to a coherent superposition of two modes propagating in waveguides L and R with $-\hbar$ OAM each.

We have further investigated the role of the dissipation on the dynamics of the propagating modes. Our calculations reveal that for high values of the absorption coefficient at the waveguide C , i.e., for $\gamma \gg \kappa_{1,2}$, the waveguides R and L become completely decoupled from waveguide C . This scenario resembles the quantum Zeno effect associated to the dynamical inhibition of the population excitation for a coherently driven atomic system under continuous observation of its fluorescence^{17,18}. From numerical simulations with the parameters of the system here investigated, we have checked that Zeno-like regimes only appear for $\gamma > 10^9 \text{ m}^{-1}$.

Conclusions

In summary, in this work we have demonstrated the existence of OAM bright and dark optical supermodes in three-evanescent coupled step-index cylindrical waveguides. Bright and dark supermodes are characterized by its coupling and decoupling from the central waveguide of the system, respectively. Under this scenario, we have shown that the output optical modes from the waveguides can be engineered by adding dissipation to the central waveguide, which makes the system to absorb the bright supermodes when they propagate through the system. In particular, we have proposed the use of the bright and dark OAM supermodes for cloning of the input OAM mode into another waveguide and also for inverting, i.e. changing, the

sign of the OAM mode propagating along one of the waveguides. In addition to the possibility of controlling OAM modes in coupled waveguides, we recall the interest of our approach due to the natural appearance of complex couplings depending on the angle between waveguides in a triangular configuration. This method introduces a new degree of freedom to control phases in photonic quantum simulators^{19,20}. Finally, note that although we have restricted our analysis to a fundamental geometry based on three-coupled waveguides, the here shown results could be applied to waveguides arrays having in-line or right triangle three-coupled waveguides as unit cells.

Methods

Coupling coefficients in the symmetric-center-antisymmetric basis

The SCA basis formed by symmetric (S), central (C), and antisymmetric (A) supermodes, is defined by states $|C\pm\rangle$ and:

$$|S\pm\rangle \equiv \frac{1}{\sqrt{2}}(|L\pm\rangle + |R\pm\rangle), \quad (16)$$

$$|A\pm\rangle \equiv \frac{1}{\sqrt{2}}(|L\pm\rangle - |R\pm\rangle). \quad (17)$$

By taking into account the form of the OAM modes allowed in step-index cylindrical waveguides, it is straightforward to obtain the coupling coefficients between $|S\pm\rangle$, $|A\pm\rangle$, and $|C\pm\rangle$:

$$\kappa_{qg}^{th} = 0 \text{ for } q, t = \{S, A\}; g, h = \pm, \quad (18)$$

$$\kappa_{S,\pm}^{C,\pm} = \sqrt{2}\kappa_1, \quad (19)$$

$$\kappa_{S,\pm}^{C,\mp} = \frac{1}{\sqrt{2}}\kappa_2(1 + e^{\pm i2\theta}), \quad (20)$$

$$\kappa_{A,\pm}^{C,\pm} = 0, \quad (21)$$

$$\kappa_{A,\pm}^{C,\mp} = \frac{1}{\sqrt{2}}\kappa_2(1 - e^{\pm i2\theta}), \quad (22)$$

where κ_1 and κ_2 are given by Eqs. (5) and (6), respectively.

Coupling coefficients in the bright-center-dark basis

We define two BCD bases from the symmetric and antisymmetric supermodes defined above for the a) right triangular and b) in-line configurations.

a) Right triangle configuration.

By defining

$$|F\pm\rangle \equiv \frac{1}{\kappa}(\kappa_1|S\pm\rangle + \kappa_2|A\mp\rangle), \quad (23)$$

$$|G\pm\rangle \equiv \frac{1}{\kappa}(\kappa_1|S\pm\rangle - \kappa_2|A\mp\rangle), \quad (24)$$

where $\kappa = \sqrt{\kappa_1^2 + \kappa_2^2}$, the coupling coefficients between $|F\pm\rangle$, $|G\pm\rangle$, and $|C\pm\rangle$ can be obtained from Eqs. (19)–(22):

$$\kappa_{qg}^{th} = 0 \text{ for } q, t = \{F, G\}; g, h = \pm, \quad (25)$$

$$\kappa_{F,\pm}^{C,\pm} = \frac{1}{\kappa} \left[\sqrt{2}\kappa_1^2 + \frac{\kappa_2^2}{\sqrt{2}}(1 - e^{\pm i2\theta}) \right], \quad (26)$$

$$\kappa_{F,\pm}^{C,\mp} = \frac{\kappa_1\kappa_2}{\sqrt{2}\kappa}(1 + e^{\mp i2\theta}), \quad (27)$$

$$\kappa_{G,\pm}^{C,\pm} = \frac{\kappa_1\kappa_2}{\sqrt{2}\kappa}[1 + e^{\pm i2\theta}], \quad (28)$$

$$\kappa_{G,\pm}^{C,\mp} = \frac{\kappa_1\kappa_2}{\sqrt{2}\kappa}(1 + e^{\mp i2\theta}). \quad (29)$$

Note that, for $\theta = \frac{\pi}{2}$, $\kappa_{G,\pm}^{C,\pm} = \kappa_{G,\pm}^{C,\mp} = 0$, which means that supermodes $|G\pm\rangle$ become completely decoupled from waveguide C and we recover expressions (12) for the dark supermodes and (11) for the bright ones.

b) In-line configuration.

Analogously, we define:

$$|\tilde{F}\pm\rangle \equiv \frac{1}{\sqrt{2}}(|S-\rangle \pm |S+\rangle), \quad (30)$$

$$|\tilde{G}\pm\rangle \equiv \frac{1}{\sqrt{2}}(|A+\rangle \pm |A-\rangle), \quad (31)$$

with couplings

$$\kappa_{\text{qg}}^{\text{t,h}} = 0 \text{ for } q, t = \{B_2, D_2\}; g, h = \pm, \quad (32)$$

$$|\kappa_{F\pm}^{\text{C}\pm}| = |\kappa_{F\pm}^{\text{C}\mp}| = \frac{1}{\sqrt{2}} \left[\frac{\kappa_2}{\sqrt{2}} (1 + e^{-i2\theta}) \pm \kappa_1 \sqrt{2} \right], \quad (33)$$

$$|\kappa_{G\pm}^{\text{C}\pm}| = |\kappa_{G\pm}^{\text{C}\mp}| = \frac{\kappa_2}{2} (1 - e^{-i2\theta}). \quad (34)$$

In this case, decoupling between the waveguide C and supermodes $\tilde{G}\pm$ is obtained for $\theta = \pi$ recovering expressions (13) and (14). for the bright and dark supermodes, respectively.

Parameters used in the numerical simulations of the coupled-mode equations

All numerical simulations have been carried out using the following parameters: wavelength $\lambda = 1.55 \mu\text{m}$, input power $P_0 = 10 \text{ mW}$, $n_1 = 1.51$, $n_2 = 1.52$, radius of the waveguides $a = 10 \mu\text{m}$, distances between waveguides $d_{LR} = d_{RC} \equiv d = 1.2a$, and absorption coefficient $\gamma = 3 \times 10^4 \text{ m}^{-1}$. With these parameters, the coupling coefficients κ_1 and κ_2 given by Eqs. (1)–(3) are: $\kappa_1 = 5.0 \times 10^4 \text{ m}^{-1}$, and $\kappa_2 = 4.5 \times 10^4 \text{ m}^{-1}$.

References

1. Chen, CL. Foundations for Guided-Wave Optics (ed. Chen, CL.) (John Wiley & Sons, 2013).
2. Okamoto, K. Fundamentals of Optical Waveguides (ed. Okamoto, K.) (Elsevier, 2006).
3. Prieto, F. *et al.* An integrated optical interferometric nanodevice based on silicon technology for biosensor applications. *Nanotechnology* **14**, 907-912 (2003).
4. Menchon-Enrich, R. *et al.* Light spectral filtering based on spatial adiabatic passage. *Light Sci. Appl.* **2**, e90 (2013).
5. Meany, T. *et al.* Laser written circuits for quantum photonics. *Laser Photon. Rev.* **9**, 363-384 (2015).
6. Politi, A. Martin, J. C. Rarity, J. G. Yu, S. and O'Brien, J. L. Silica-on-silicon waveguide quantum circuits. *Science* **320**, 646-649 (2008).
7. Yao, A. M. and Padgett, M. J. Orbital angular momentum: origins, behavior and applications. *Adv. Opt. Photonics* **3**, 161-204 (2011).
8. Molina-Terriza, G. Torres, J. P. and Torner, L. Twisted photons. *Nature Phys.* **3**, 305-310 (2007).
9. Allen, L. Beijersbergen, M. W. Spreeuw, R. J. C. and Woerdman, J. P. Orbital angular momentum of light and the transformation of Laguerre-Gaussian laser modes. *Phys. Rev. A* **45**, 8185 (1992).
10. Volke-Sepulveda, K. Garcés-Chávez, V. Chávez-Cerda, S. Arlt, J. and Dholakia, K. Orbital angular momentum of a high-order Bessel light beam. *J. Opt. B. Quantum Semiclassical Opt.* **4**, S82 (2002).
11. Alexeyev, C. N. Boklag, N. A. Fadeyeva, T. A. and Yavorsky, M. A. Tunnelling of orbital angular momentum in parallel optical waveguides. *J. Opt.* **13**, 064012 (2011).
12. Alexeyev, C. N. Boklag, N. A. and Yavorsky, M. A. Higher order modes of coupled optical fibres. *J. Opt.* **12**, 115704 (2012).
13. Alexeyev, C. N. Milodan, A. V. Alexeyeva, M. C. and Yavorsky, M. A. Inversion of the topological charge of optical vortices in a coil fiber resonator. *Opt. Lett.* **41**, 1526-1529 (2016).
14. Goldman, N. Juzeliūnas, G. Öhberg, P. and Spielman, I. B. Light-induced gauge fields for ultracold atoms. *Rep. Prog. Phys.* **77**, 126401 (2014).
15. Arimondo, E. and Orriols, G. Nonabsorbing atomic coherences by coherent two-photon transitions in a three-level optical pumping. *Lett. Nuovo Cimento* **17**, 333-338 (1979).

16. Orriols, G. Nonabsorption resonances by nonlinear coherent effects in a three-level system. *Nuovo Cimento B* **53**, 1-24 (1979).
17. Misra, B. and Sudarshan, E. C. G. The Zeno's paradox in quantum theory. *J. Math. Phys.* **18**, 756 (1977).
18. Kofman, A. G. and Kurizki, G. Acceleration of quantum decay processes by frequent observations. *Nature* **405**, 546-550 (2000).
19. Longhi, S. Quantum-optical analogies using photonic structures. *Laser Photon. Rev.* **3**, 243-261 (2009).
20. Aspuru-Guzik, A. and Walther, P. Photonic quantum simulators. *Nature Phys.* **8**, 285-291 (2012).

Acknowledgements

The authors gratefully acknowledge financial support through the Spanish Ministry of Science and Innovation (MINECO) (Contract No. FIS2014-57460P) and the Catalan Government (Contract No. SGR2014-1639). J.P. acknowledges financial support from the MICINN through the Grant No. BES-2012-053447. G.P. acknowledges financial support from the MICINN through the Grant No. BES-2015-073772.

Author contributions statement

J. P. and G. P. developed the six-state model. A. T. made the numerical simulations and conceived the idea of using dissipation to engineer OAM modes. J. M. and V. A. proposed and supervised the project. All authors wrote the manuscript.

Additional information

Competing financial interests

The authors declare no competing financial interests.